



Phone: 01282 696214  
 salesoffice@dale-techniche.co.uk  
 www.dale-techniche.co.uk

Throstle Nest Mill  
 Leeds Road  
 Nelson  
 England  
 BB9 7QZ

FS3D

Date: 06.05.2026

**USER INFORMATION**



**Garments made from 100% FR Treated Cotton fabrics conforming to EN ISO 11612:2015.**

**Intended Uses**

In the design of this garment due respect has been paid to the basic health and safety requirements laid out in Annex II of the PPE Regulation (EU) 2016/425.



EN ISO 11612 intended use:

This garment has been designed to give a specified level of protection against accidental contact with flame and against certain forms of heat transfer.




The garment conforms to EN ISO 11612:2015 "Protective clothing — Clothing to protect against heat and flame". It meets the following requirements:

**EN ISO 11612:2015  
 A1 B1 C1**

- Code Letter A1 – Limited Flame Spread (Face)
- Code Letter B – Convective Heat (to Level B1)
- Code Letter C – Radiant Heat (to Level C1)

It is not designed to protect against molten aluminum and iron splash (Code Letters D and E).

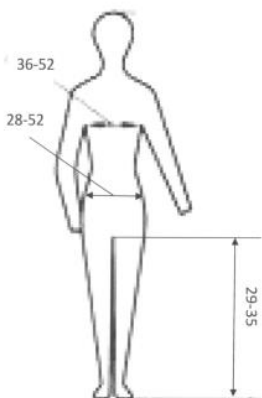

COVERALLS/SUITS										
SIZE	XS	S	M	L	XL	2XL	3XL	4XL	5XL	
CHEST (INCHES)	36"	38"	40"	42"	44"	46"	48"	50"	52"	
(CM)	90cm	95cm	100cm	105cm	110cm	115cm	120cm	125cm	130cm	
LEG LENGTHS AVAILABLE	SHORT	REG	TALL	XTALL						
	29"	31"	33"	35"						
TROUSERS										
WAIST (INCHES)	28"	30"	32"	34"	36"	38"	40"	42"	44"	
(CM)	70cm	75cm	80cm	85cm	90cm	95cm	100cm	105cm	110cm	
LEG LENGTHS AVAILABLE	SHORT	REG	TALL	XTALL						
	29"	31"	33"	35"						
JACKETS/LONG COATS										
SIZE	XS	S	M	L	XL	2XL	3XL	4XL	5XL	
CHEST (INCHES)	36"	38"	40"	42"	44"	46"	48"	50"	52"	
(CM)	90cm	95cm	100cm	105cm	110cm	115cm	120cm	125cm	130cm	

Made-to-measure and out sizes available upon request.

## Effective use

Environmental conditions and risks at the working site shall be considered prior to use of this garment.

For full body protection, the protective clothing shall be worn closed/fastened and other suitable PPE shall be used (helmet and face screen, gloves with cuffs, footwear). No undergarments or under layers should be used which melt under heat exposure, e.g. those made of polyamide, polyester or acrylic.

The garment should not be opened or removed whilst in the presence of flammable or explosive atmospheres or while handling flammable or explosive substances.

## Warning

- The level of protection against flame will be reduced if the protective clothing is contaminated with flammable materials.
- In the event of an accidental splash of chemical or flammable liquids on this clothing, the wearer should immediately withdraw from the area of risk and carefully remove the protective garments, ensuring that the chemical or liquid does not come in contact with any part of the skin.
- An increase in the oxygen content of the air will reduce considerably the protection of the welders' protective clothing against flame. Care should be taken when welding in confined spaces, e.g. if it is possible that the atmosphere may become enriched with oxygen.
- The garment shall not be used in oxygen enriched atmospheres without prior approval of the responsible safety engineer
- The performance of protective clothing can be affected by wear and tear, laundering and possible contamination. Wash flame retardant garments separately.
- The air trapped between layers of material plays an important part in providing heat insulation. The protection is reduced in areas which are tight fitting or compressed by belt or straps. Coveralls or jacket and trousers can only provide protection if junctions between garments or with other garments at the neck, wrists and ankles is adequate.

## Care Instructions



Domestic wash at 40°C  
No Bleaching  
Cool Iron  
Can not be dry cleaned  
Tumble Dry (Low Heat)

## Repair Instructions

Do not repair this garment using fabrics thread other than those of the same Construction and flame-retardant properties as used in the garment. The garment may be disposed of using normal methods for textile garments, There are no hazards from disposal by incineration or mechanical disruption. **WARNING-** Tears should not be repaired by the user. Any repair made using a flammable (not flameproof) thread and or heat reactivatable fabric that is likely to melt would be very dangerous in the event of exposure to flame. **Consult the manufacturer before attempting repair**

## Maintenance Instructions

Store garments in a clean and dry environment, away from direct sunlight.  
Transport the garment in the package provided.

## Notified Body:

Notified Body for CE marking:

Shirley® Notified Body 2895, Port Tunnel Business Park, Office 13 Unit 21, Dublin 17, ROI. performed the EU type-examination (Module B).

The items are subject to the conformity assessment procedure Module D under surveillance of Shirley®, Notified Body 2895, Port Tunnel Business Park, Office 13 Unit 21, Dublin 17, ROI.

Further information on this garment can be obtained from Dale Techniche Ltd. at the location shown at the top of this page.

Certificates of Conformity can be accessed by logging on to [www.daledoc.co.uk](http://www.daledoc.co.uk).